


DRIP PAN ELBOWS

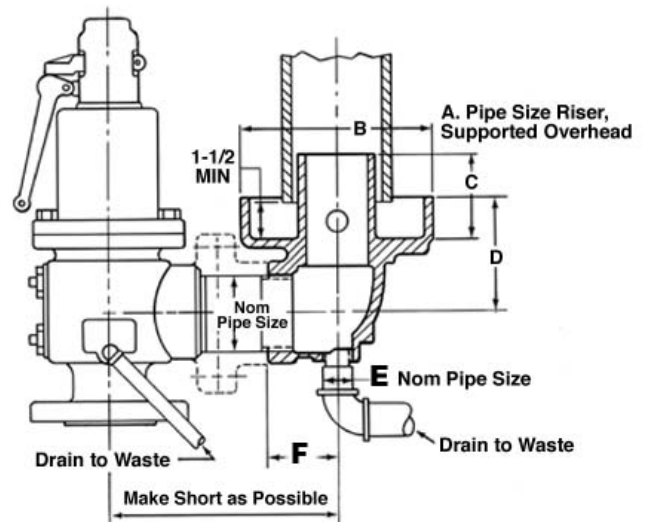

FEATURES

- Collects condensate from steam safety relief valve vent discharge.
- Isolation of steam safety relief valve from discharge piping stress
- Compatible with all ASME safety relief valves.

RATINGS

PMO: (maximum operating pressure) 250 psi
 TMO: (maximum operating temperature) 406°F

MATERIALS

Part	Description
Body	Cast Iron (Carbon steel for 10" valve only)

DIMENSIONS AND WEIGHTS

MODEL	Valve Outlet	A		B		C		D		E		F		Weight	
		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lbs
DPE-07	3/4"	50	2	95	3-3/4	70	2-3/4	50	2	10	3/8	38	1-1/2	0.9	2
DPE-10	1"	50	2	95	3-3/4	70	2-3/4	50	2	10	3/8	38	1-1/2	0.9	2
DPE-12	1-1/4"	50	2	140	5-1/2	125	4-15/16	105	4-1/8	10	3/8	54	2-1/8	1.8	4
DPE-15	1-1/2"	50	2	140	5-1/2	125	4-15/16	105	4-1/8	10	3/8	54	2-1/8	1.8	4
DPE-20	2"	75	3	160	6-1/4	117	4-5/8	92	3-5/8	15	1/2	57	2-1/4	2.7	6
DPE-25	2-1/2"	100	4	187	7-3/8	140	5-9/16	110	4-15/16	20	3/4	68	2-11/16	5	11
DPE-30	3"	100	4	200	8	165	6-1/2	125	4-7/8	20	3/4	79	3-1/8	6.4	14
DPE-40	4"	150	6	245	9-5/8	210	8-1/4	145	5-3/4	20	3/4	95	3-3/4	11.8	26
DPE-60	6"	200	8	325	12-3/4	295	11-9/16	192	7-9/16	20	3/4	203	8	33.6	74
DPE-80	8"	250	10	420	16-1/2	378	14-7/8	243	9-9/16	25	1	273	10-3/4	45.4	100
DPE-100	10"	300	12	500	20	215	8-1/2	420	16-1/2	25	1	165	6-1/2	100	220

Sizes 3/4" through 4" have female NPT inlet connection. Sizes 6" and 8" have 125# flanged inlet connection. Size 10" has a 150# flanged inlet connection

Colton has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice

